





PRODUCTION
DRIVER AIRBAG

NEW TWO-CHAMBER
DRIVER AIRBAG

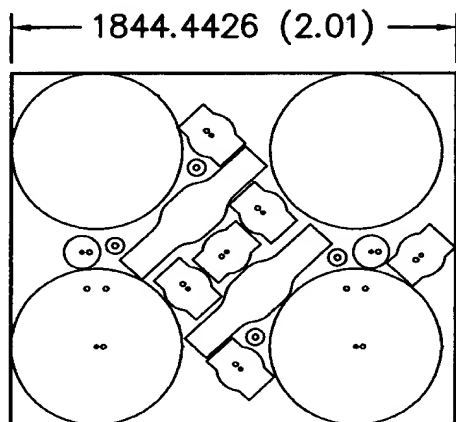

USES 1.005 LINEAR YARD/BAG

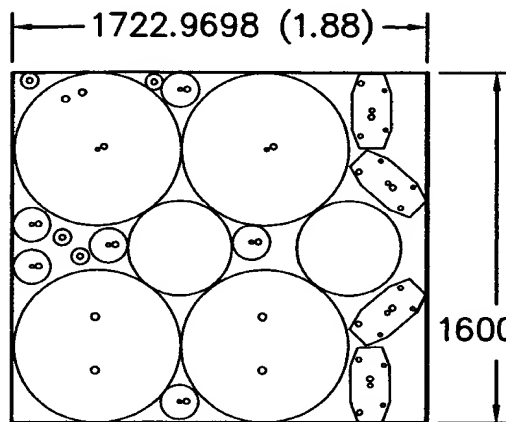

USES 0.94 LINEAR YARD/BAG

FIG. -6-

FIG. -7-

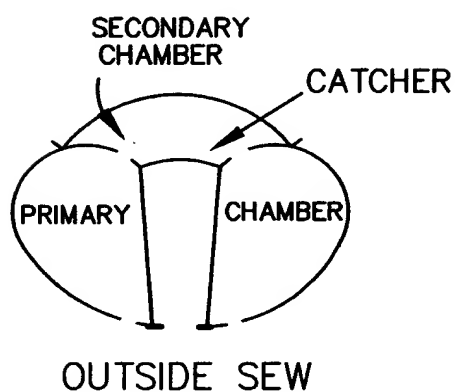


FIG. -8-

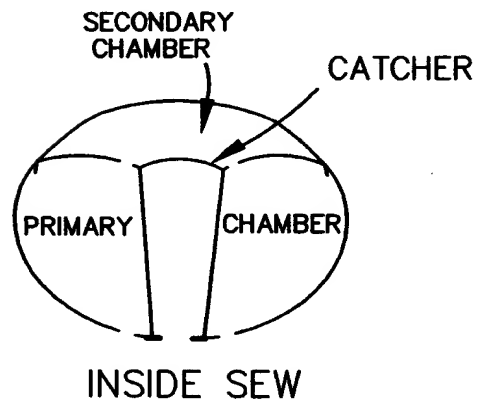


FIG. -9-

THREE CHAMBER AIRBAG

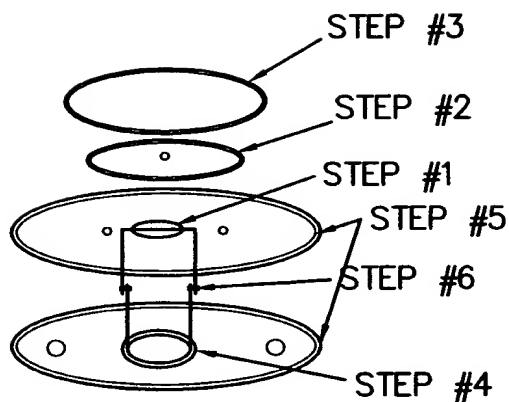


FIG. -37-


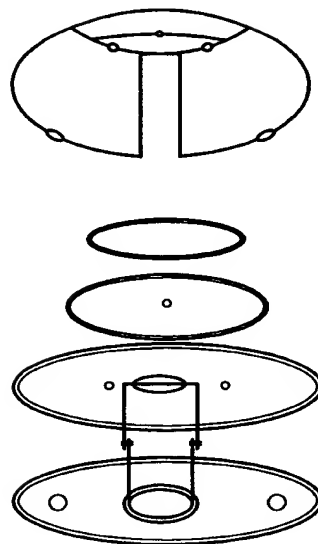


FIG. -38-


PRODUCTION DRIVER BAG

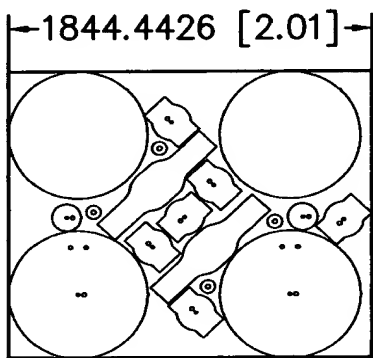

PRODUCTION BAG USES
1.005 Ln.Yds. PER BAG

FIG. -39-

THREE CHAMBER AIRBAG

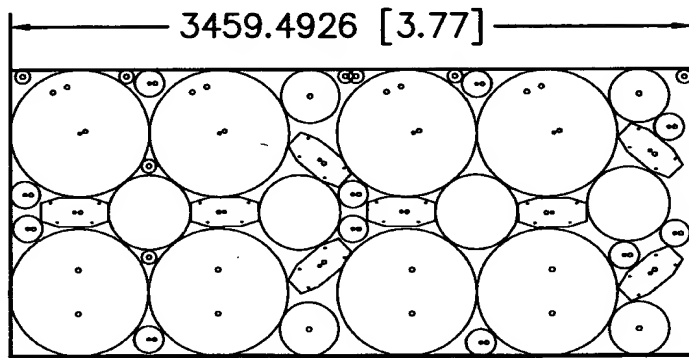

NEW AND IMPROVED BAG
USES 0.94 Ln.Yds. PER BAG

FIG. -40-